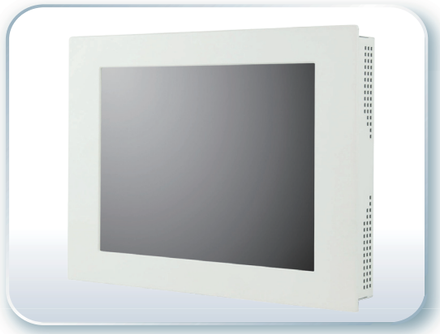

Features

- 19” High Brightness TFT LCD with resolution of 1280x1024
- Steel Metal Enclosure
- NEMA 4/IP 65 compliant front bezel
- Rear OSD
- VESA 75-75 and panel Mount
- Anti-Reflection glass in front for protection (Optional Touch Panel)
- AC 100-240V power input, DC 11~32V for option
- VGA input, Optional for DVI, Video and S-Video input

Specifications

LCD	
Display Type	19” TFT- LCD
Max. Resolution	1280x1024
Max. Color	16.7M
Luminance (cd/m^2)	1000 nits
View Angle	H:170° / V:160°
Backlight Lifetime	50,000 hrs

System	
On Screen Display Control	On the rear side
External I/O Port	Standard I/O: 1 x VGA input 1 x AC 100~240V Power Input Optional I/O: DVI Video S-Video Touch I/O DC 11~32V
Power Input	AC 100~240V input, DC 11~32V for option
Touch Screen	Resistive Type
Light Transmission	80%

Mechanical	
Construction	Steel
IP Rating	Front Panel IP65
Mounting	Panel / VESA 75x75 Mount
Dimension	467(W) x 379(H) x 68(D) mm
Net Weight	8 kgs

Environmental	
Operating Temperature	0~50 °C
Storage Temperature	-20~60 °C
Storage Humidity	10~90% @40 °C non-condensing
Certificate	CE/FCC Class A

Dimension

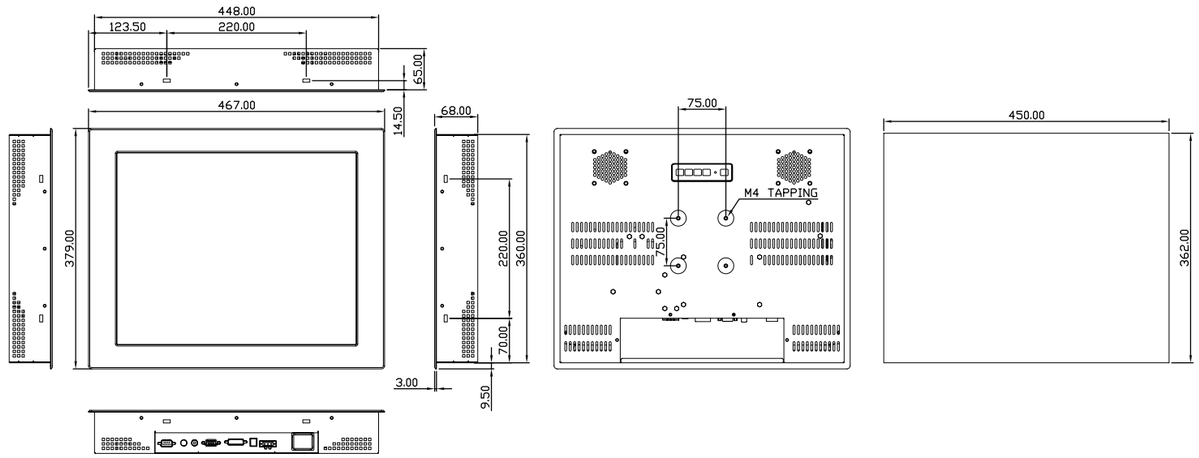

All specifications and photos are subject to change without notice.
Industrial Display