



Features

- Full Flat Bezel Design
- Projective Capacitive Touch
- Great Thermal Design
- Wide Working Temperature
- LED Backlight LCD

Specifications


System	
Processor	Intel Atom Processor D525 1.8 GHz DMI 64 bit
System Memory	1 x 204-pin DDR3 800 MHz SO-DIMM slot, 2 GB
System Chipset	Intel ICH8M
External I/O Port	Standard I/O: <ul style="list-style-type: none"> • 2 x USB ports • 1 x RJ-45 GbE LAN • 1 x DB-9 RS-232 (COM 1) connector • 1 x DB-9 RS-232/422/485 (COM 2) connector, Default RS-232 • 1 x DC power input
Storage	<ul style="list-style-type: none"> • 1 x 2.5" SATA HDD • 1 x CF Slot (internal)
Expansion Slots	None
OS Support	Windows XP Pro, XP Embedded, Windows 7, WES7

LCD	
Display Type	15" TFT-LCD
Max. Resolution	1024x768
Max. Color	16.7M
Luminance (cd/m ²)	400
View Angle	H:160° / V:140°
Backlight Lifetime	50,000hrs

Touch Screen	
Type	Projective Capacitive Touch
Light Transmission	80%

Power Supply	
Power Input	DC 11~32V

Dimension

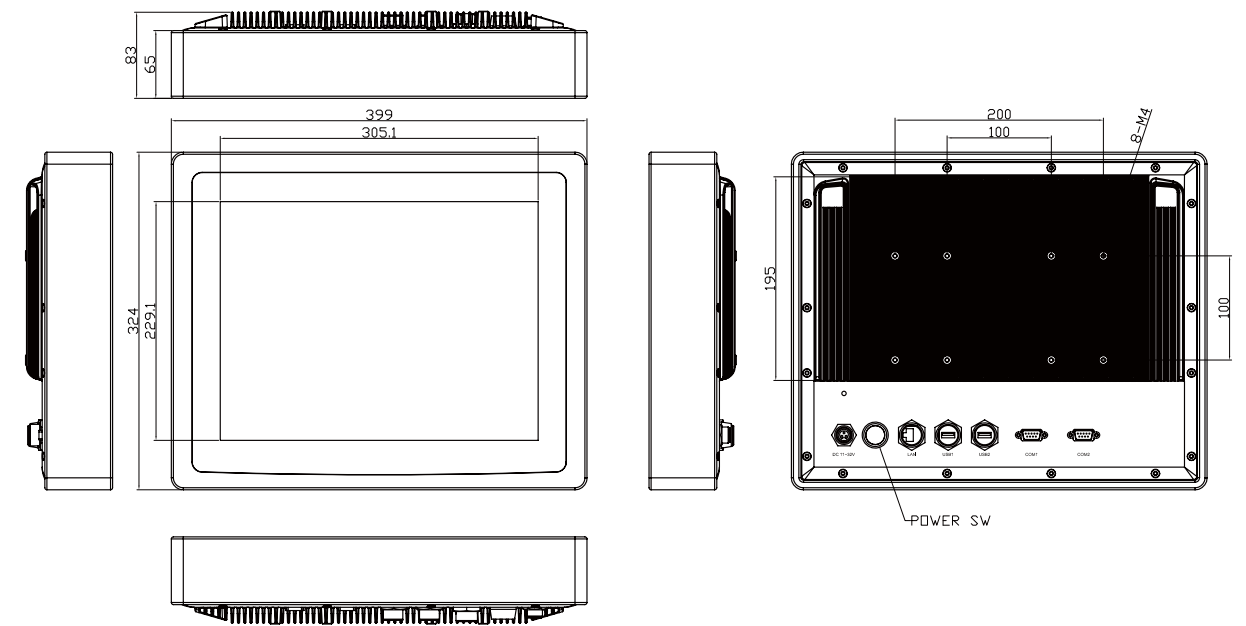

Mechanical	
Construction	Stainless steel
IP Rating	IP 65
Mounting	VESA 75x75 mount
Dimension	399(W)x324(H)x64.3(D) mm
Net Weight	6.9kgs

Environmental	
Operating Temperature	-20~60 °C
Storage Temperature	-30~70 °C
Storage Humidity	10~90% @40 °C non-condensing
Certificate	CE/FCC Class A