

Features

- Open Frame, Fanless Design
- Cost Effective
- Touch Screen for Option
- All Solid Capacitor Motherboard
- Wide Range DC 11~32V Power Input for Option

Specifications


System	
Processor	Intel Atom N270 processor
System Memory	1GB DDR2 SODIMM 533 MHz ,up to 2GB, default 1GB
System Chipset	Intel 945GSE + Intel ICH7M
External I/O Port	<ul style="list-style-type: none"> 4 x USB 2.0 2 x GbE RJ-45 LAN port 1 x DB-15 VGA 1 x DB-9 RS-232 2 x DB-9 for RS-232 or optional RS-422/485 1 x 3 Pin terminal block DC power input 1 x 4 Pin terminal block, 2 Pin for power on/of f connector, 1 Pin for ground, 1 Pin as VCC
Storage	<ul style="list-style-type: none"> 1 x 2.5" SATA HDD 1 x CF Slot (Internal)
Expansion Slots	None
OS Support	Windows XP Professional, XP Embedded

LCD	
Display Type	8" TFT-LCD
Max. Resolution	800x600
Max. Color	262K
Luminance (cd/m ²)	350
View Angle	H:130° / V:110°
Backlight Lifetime	50,000hrs

Touch Screen	
Type	Resistive Touch (Option)
Light Transmission	80%

Power Supply	
Power Input	DC 12V, DC 11~32V for option

Dimension

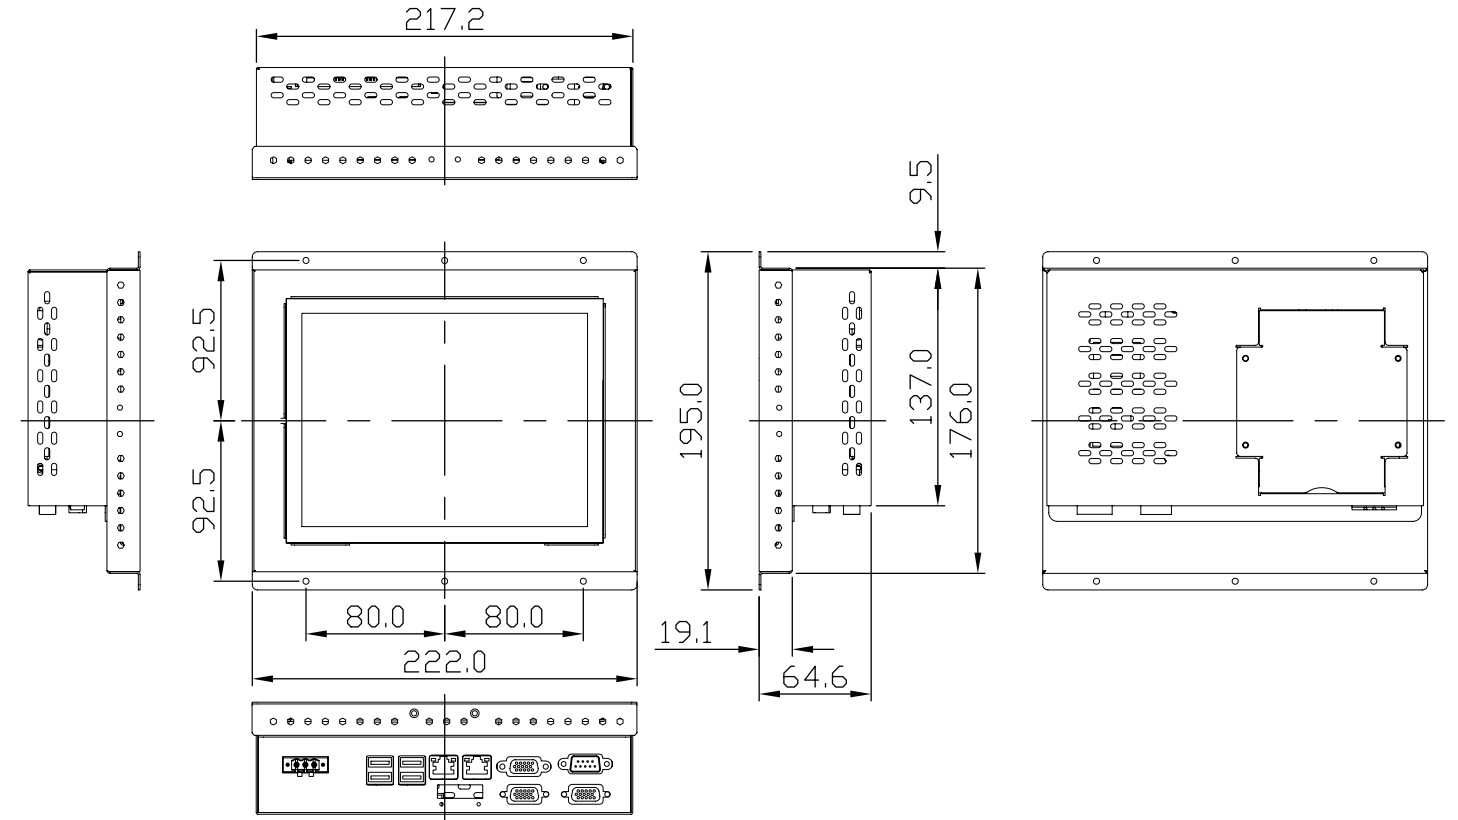

Mechanical	
Construction	Steel molding housing
IP Rating	None
Mounting	Panel mount
Dimension	222(W)x176(H)x64.6(D)mm
Net Weight	TBD

Environmental	
Operating Temperature	0~40 °C without fan / 0~60 °C with fan
Storage Temperature	-20~70 °C
Storage Humidity	10~90% @40 °C non-condensing
Certificate	CE/FCC Class A

Ordering Information	
OPC-5087	8" SVGA 800 x 600 fanless open frame PC with Atom N270 1.6G CPU , 1GB DDR2 533MHZ Memory, 12V DC input with adaptor, steel enclosure