



Features

- Open Frame, Fanless Design
- Cost Effective
- Touch Screen for Option
- All Solid Capacitor Motherboard
- Wide Range DC 11~32V Power Input for Option

Specifications

System

Processor	Intel Atom N270 processor
System Memory	1GB DDR2 SODIMM 533 MHz ,up to 2GB, default 1GB
System Chipset	Intel 945GSE + Intel ICH7M
External I/O Port	<ul style="list-style-type: none"> • 4 x USB 2.0 • 2 x GbE RJ-45 LAN port • 1 x DB-15 VGA • 1 x DB-9 RS-232 • 2 x DB-9 for RS-232 or optional RS-422/485 • 1 x 3 Pin terminal block DC power input • 1 x 8 Pin terminal block, 2 Pin for power on/of f connector, 1 Pin for ground, 1 Pin as VCC, and 2 in/out DIO • 1 x CF slot (external) for option
Storage	<ul style="list-style-type: none"> • 1 x 2.5" SATA HDD • 1 x CF Slot (Internal)
Expansion Slots	None
OS Support	Windows XP Professional, XP Embedded

LCD

Display Type	12" TFT-LCD
Max. Resolution	800x600
Max. Color	262K
Luminance (cd/m ²)	350
View Angle	H:140° / V:110°
Backlight Lifetime	50,000hrs


Touch Screen

Type	Resistive Touch (Option)
Light Transmission	80%

Power Supply

Power Input	DC 12V, DC 11~32V for option
-------------	------------------------------

Dimension

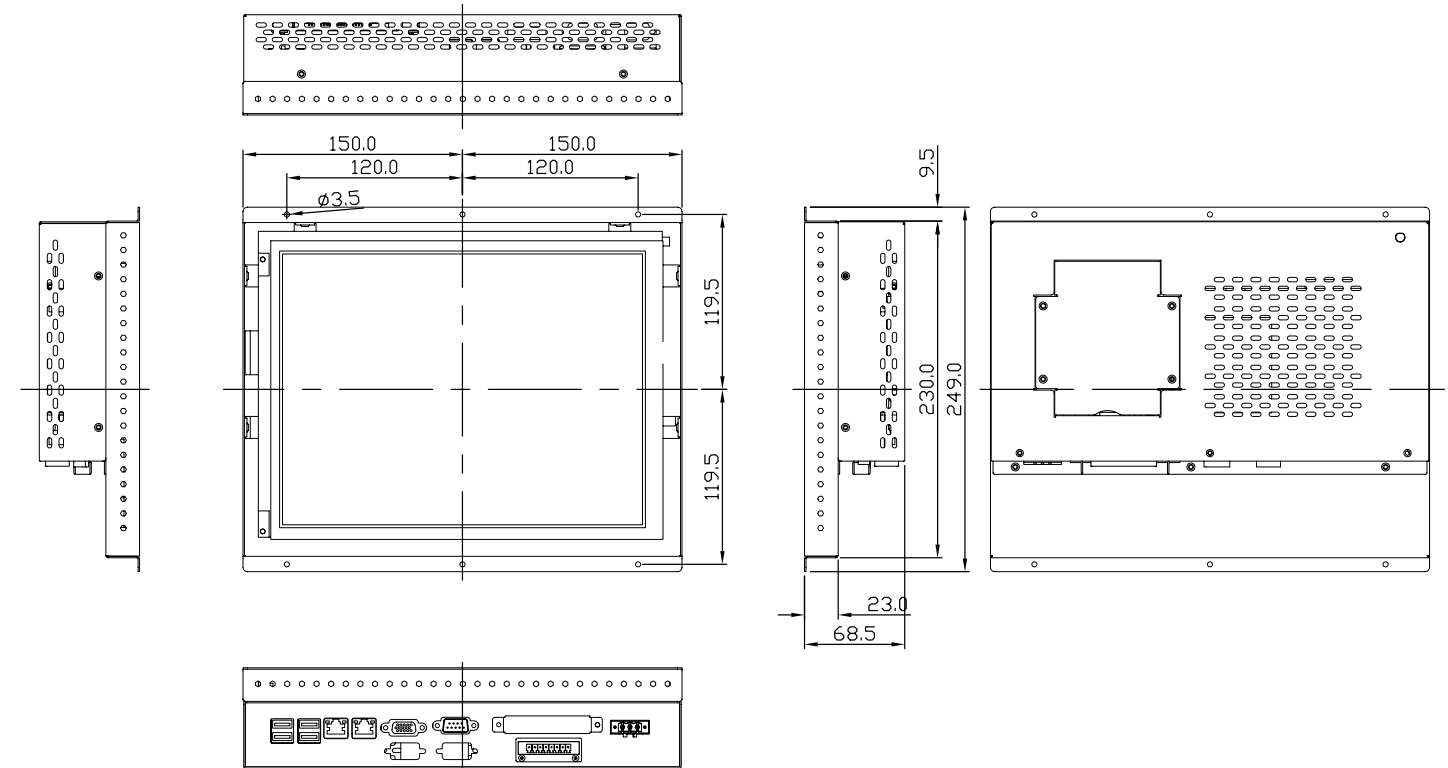

Mechanical

Construction	Steel molding housing
IP Rating	None
Mounting	Panel mount
Dimension	300(W)x230(H)x68.5(D)mm
Net Weight	TBD

Environmental

Operating Temperature	0~40 °C without fan / 0~60 °C with fan
Storage Temperature	-20~70 °C
Storage Humidity	10~90% @40 °C non-condensing
Certificate	CE/FCC Class A

Ordering Information

OPC-5127	12" SVGA 800 x 600 fanless open frame PC with Atom N270 1.6G CPU, 1GB DDR2 533MHZ Memory, 12V DC input with adaptor, steel enclosure
----------	--